


# xVision Touring G2 4.8 SMD Black Face

## Specifications

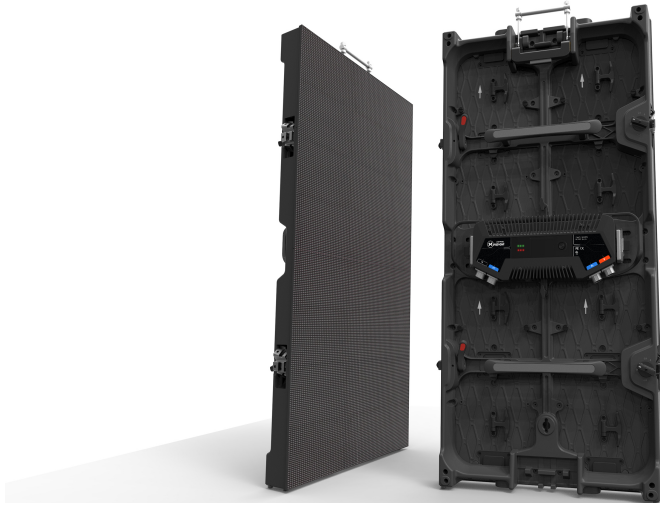

<b>XVT2-HRR4.8SMD-OUT</b>		
<b>Pixel</b>	Packaging Pixel Pitch LED Series	RGB SMD 3-in1 1921 Black LED 4.8 mm Nationstar RS Series
<b>Mechanical</b>	Cabinet Material Panel resolution Panel dimensions Panel weight Installation & Servicing	Die-cast aluminium 104 x 208 px 500 x 1000 mm 17 kg Front/rear access to all components and mounting points
<b>Optical</b>	Brightness Contrast ratio Lifespan Color Temperature Horizontal Viewing Angle Vertical Viewing Angle	4200 nits 5000:1 70,000 hours Adjustable 3200-9000K 140 degrees 140 degrees
<b>Colorimetry</b>	Wavelength, Red Wavelength, Green Wavelength, Blue	620-625 nm 523-528 nm 470-472 nm
<b>Electrical</b>	Max Power Consumption Average Power Consumption Input Voltage	500 W/panel 280 W/panel 100-250V, 50-60Hz auto-ranging
<b>Processing</b>	Driving Mode Grayscale depth Refresh Rate Video Frame Rate	1/8 Scan 14 Bits 3840 Hz 60 Hz
<b>Environmental</b>	Protection Rating Operating Temperature Storage Temperature Operating Humidity Storage Humidity Warranty	IP65 -20C @ +40C -10C @ +60C 10-90% Non-condensing 10-90% Non-condensing 2 years
<b>Certifications</b>	Electrical Safety Electro Magnetic Compliance	UL 60950-1:2007, CSA C22.2#60950-1:2007 FCC Part 15 Class B, ICES-003/NMB-003 Class A