


xVision Totem Indoor 2.5 mm single width

Specifications

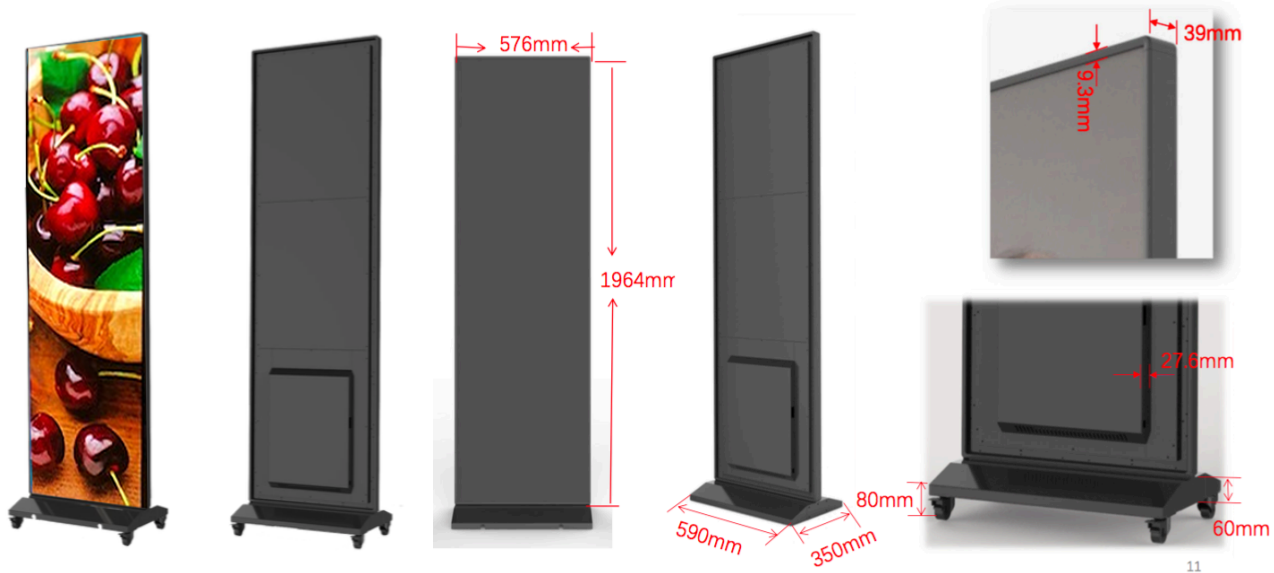

11

Pixel	Packaging Pixel Pitch	RGB SMD 3-in1 LED 2.571 mm
Mechanical	Cabinet Resolution Cabinet dimensions (W x h) Cabinet Weight Cabinet thickness (d) Module resolution Module dimensions (W x h) Installation Cooling	224 x 756 px 596 x 1964 mm 36 kg 39 mm (excl. control box and base) 112 x 84 pixels 288 x 216 mm Wall mount, floor stand Passive
Optical	Brightness Lifespan Color Temperature Horizontal Viewing Angle Vertical Viewing Angle	> 800 Nits 50,000 hours 6500K 160 degrees 160 degrees
Electrical	Max Power Consumption Average Power Consumption Input Voltage	600 watts / unit 210 watts / unit 100-240V, 50-60Hz auto-ranging
Processing	Driving Mode Grayscale depth Refresh Rate Video Frame Rate Control System	TBC TBC Up to 4000 Hz 60 Hz Novastar PBOX150 standalone
Environmental	Protection Rating Operating Temperature Operating Humidity Warranty	IP40 -10C @ +50C 10-90% RH 2 years

Application example

